NON RETURN VALVE

CAST IRON | PN-16 (Lift Type)

DESIGN & COMPLIANCES

EN 12334, EN 558 (10), BS 5153, BS 4090

END CONNECTION

EN 1092, BS 4504

TESTING STANDARD

BS 6755, EN 12266-1

APPLICATIONS

Water Supply, Oil, Gas, Steam, Raw Water, Waste Water

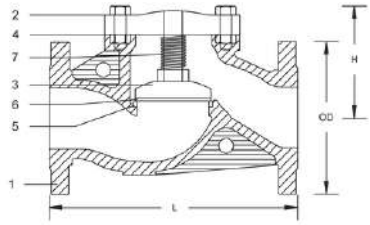

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Cast Iron EN-GJL-250
2	Cover	Cast Iron EN-GJL-250
3	Disc	Cast Iron EN-GJL-250
4	Gasket	Non Asbestos
5	Body Seat Ring	SS 304 | SS 316 | SS Cr13 | Brass CW614N | Bronze CC491K
6	Seat Ring Ring	SS 304 | SS 316 | SS Cr13 | Brass CW614N | Bronze CC491K
7	Spring	SS 304 | SS 316
Painting		Epoxy | Corrosion Resistant | Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Gasket Spiral Wound, Wire Woven
- Brass, Bronze Seat Rings

DIMENSIONS (MM)									
Sizes	**50**	**65**	**80**	**100**	**125**	**150**	**200**	**250**	**300**
Face to Face (L)	230	290	310	350	400	480	600	730	850
OD (D)	165	185	200	220	250	285	340	405	460
Height (H)	195	220	235	240	275	310	370	450	490