

NON RETURN VALVE

DUCTILE IRON | PN-16 (Wafer Type)

DESIGN & COMPLIANCES

EN 558-1 (16), BS 5155, ISO 5752, API 594, DIN 3202

END CONNECTION


BS EN 1092, ANSI B16.5

TESTING STANDARD

BS 6755, EN 12266-1

APPLICATIONS

Water Supply, Oil, Gas, Steam, Raw Water, Waste Water, Air.

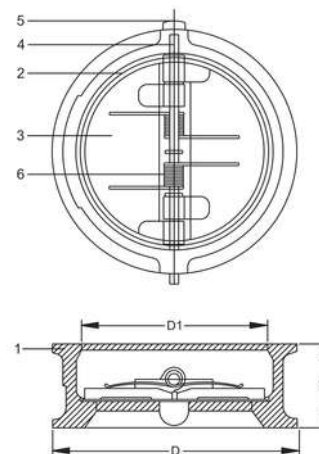

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Cast Iron EN-GJS-500 / GGG50
2	Seat	NBR EPDM
3	Disc	SS 304
4	Pin	SS 304
5	Plug	SS 304
6	Spring	SS 304
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Gasket Spiral Wound, Wire Woven
- Brass, Bronze Seat Rings

DIMENSIONS (MM)														
Sizes	50	65	80	100	125	150	200	250	300	350	400	450	500	600
Face to Face (L)	43	46	64	64	70	76	89	114	114	127	140	152	152	178
OD (D)	107	127	140	142	192	218	273	328	378	438	489	539	594	690
D1	67	80	94	115	145	170	224	265	310	360	410	450	505	624
Height (H)	105	120	140	164	194	220	275	330	380	441	492	560	640	740