

NON RETURN VALVE

DUCTILE IRON | PN-25 (Lift Type)

DESIGN & COMPLIANCES

EN 13789, EN 558-1(1), BS 5152,, DIN 3352, DIN 3202 (1)

END CONNECTION


EN 1092, BS 4504, DIN 2501

TESTING STANDARD

BS 6755, EN 12266-1

APPLICATIONS

Water Supply, Oil, Gas, Steam, Raw Water, Waste Water

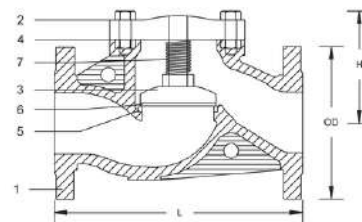

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Ductile Iron EN-GJS-500
2	Cover	Ductile Iron EN-GJS-500
3	Disc	Ductile Iron EN-GJS-500
4	Gasket	Non Asbestos
5	Body Seat Ring	SS 304 SS 316 SS Cr13 Brass CW614N Bronze CC491K
6	Seat Ring Ring	SS 304 SS 316 SS Cr13 Brass CW614N Bronze CC491K
7	Spring	SS 304
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Gasket Spiral Wound, Wire Woven
- Brass, Bronze Seat Rings

DIMENSIONS (MM)

Sizes	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700
Face to Face (L)	230	290	310	350	400	480	600	730	850	787	914	978	978	1295	1448
OD (D)	165	185	200	235	270	300	360	425	485	555	620	670	730	845	960
Height (H)	195	225	235	240	275	310	370	450	490	-	-	-	-	-	-