

AIR RELEASE VALVE

PN-16 | CLASS 150 | PN-25

DESIGN & COMPLIANCES

AWWA C512-14, JIS B2063

END CONNECTION


EN 1092, BS 4504, ANSI 16.5

TESTING STANDARD

API 598, EN 12266-1

APPLICATIONS

Hot & Cold Water, Air

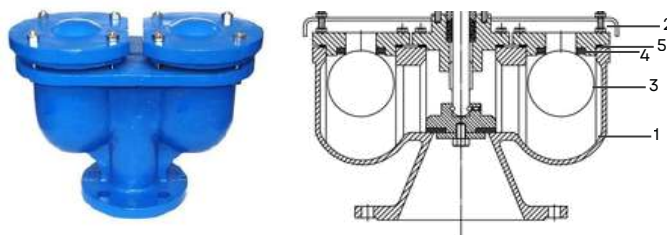

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Cast Iron EN-GJL-250 Ductile Iron EN-GJS-500
2	Top Plate	SS 304 SS 316 Cr13
3	Float Ball	SS 304 SS 316 Cr13
4	Gasket	EPDM Non Asbestos
5	Nut Bolts	Cast Steel ISO 8.8 Galvanized SS 304
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Float Ball SS 316
- Available in carbon steel material as well

DIMENSIONS (MM)

Sizes	50	80	100	150	200	250	300
Height (H)	245	280	360	385	490	585	690
Width (W)	310	340	430	545	690	840	995
PN-16 (OD)	165	200	420	285	340	405	460
Class 150 (OD)	152	191	229	279	343	406	483
PN-25 (OD)	165	200	235	300	360	425	485