

2 PIECE THREADED BALL VALVE

1000 PSI | PN-16 | PN-25 | PN-40

DESIGN & COMPLIANCES

AWWA C512-14, JIS B2063

END CONNECTION


EN 1092, BS 4504, ANSI 16.5

TESTING STANDARD

API 598, EN 12266-1

APPLICATIONS

Hot & Cold Water, Air

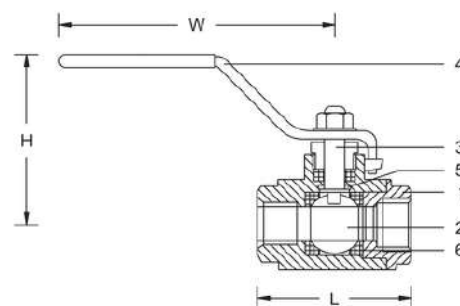

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	CF8
2	Ball	CF8
3	Stem	SS 304 SS 316 Cr13
4	Handle	SS 304 SS 316 Cr13
5	Seal Ring	PTFE
6	Cover Gasket	PTFE
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Float Ball SS 316
- Available in carbon steel material as well

DIMENSIONS (")

Sizes	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Height (H)	48	48	52	61	65	79	83	97	135	144	166
Width (W)	103	103	103	123	123	153	153	185	243	243	295
Length (L)	55	60	75	80	90	110	120	140	185	205	240