

2 PIECE THREADED BALL VALVE

1000 PSI | PN-25 | PN-40

DESIGN & COMPLIANCES

ASME B 1.20.1

END CONNECTION


DIN 3202

TESTING STANDARD

BS 6755, EN 12266-1

APPLICATIONS

Hot & Cold Water, Air, Oil.

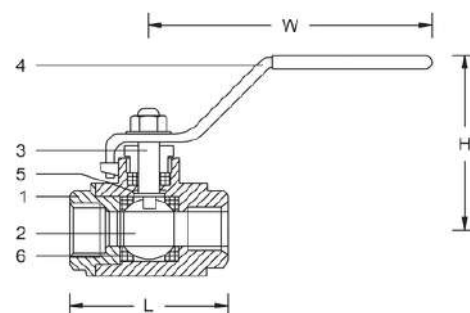

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	CF8
2	Ball	CF8
3	Stem	SS 304 SS 316 Cr13
4	Handle	SS 304 SS 316 Cr13
5	Seal Ring	PTFE
6	Cover Gasket	PTFE
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Float Ball SS 316
- Available in carbon steel material as well

DIMENSIONS (")									
Sizes	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Height (H)	51	58	65	76	89	93	120	135	170
Width (W)	105	115	125	145	160	175	210	235	305
Length (L)	54	59	74	83	96	110	144	165	200